



**DIN 965 EN ISO 7046**

YILDIZ HAVŞA BAŞLI VİDALAR (YHB)

CROSS RECESSED COUNTERSUNK HEAD SCREWS

SENKKOPFSCHRAUBE MIT KREUZ

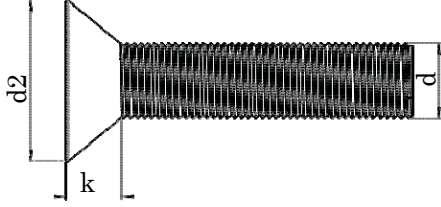

## Technical Informations / Teknik Bilgiler

Thread size / Anma çapı (d)		M2	M2.5	M3	M4	M5	M6	M8	M10
Head height / Kafa yüksekliği k	max.	1,20	1,50	1,65	2,20	2,50	3,00	4,00	5,00
	min.	3,50	4,40	5,30	7,14	8,84	10,57	14,07	17,27
Head dia / Kafa çapı d <sup>2</sup>	max.	3,80	4,70	5,60	7,50	9,20	11,00	14,50	18,00
	a	max.	0,80	0,90	1,00	1,40	1,60	2,00	2,50
PH	m	2,35	2,70	2,90	4,40	4,60	6,60	8,70	9,60
	min.	0,95	1,25	1,50	1,90	2,10	2,80	3,90	4,80
PZ	max.	1,25	1,55	1,80	2,40	2,60	3,30	4,40	5,30
	m	2,20	2,50	2,80	4,00	4,40	6,10	8,50	9,40
	min.	0,92	1,22	1,48	1,60	2,05	2,46	3,86	4,77
	max.	1,17	1,47	1,78	2,05	2,51	2,92	4,32	5,23

Thread size / Anma çapı (d)		M2	M2.5	M3	M4	M5	M6	M8	M10
Length / Boy (l)	min.	Weight / Ağırlık gr/p							
	5	4,75	0,14	0,24	0,34	0,68			
6	5,75	0,15	0,27	0,38	0,75	1,21			
8	7,7	0,19	0,33	0,47	0,90	1,45	2,19		
10	9,7	0,23	0,39	0,56	1,06	1,70	2,54	5,03	
12	11,65	0,27	0,45	0,64	1,22	1,95	2,89	5,67	9,59
16	15,65	0,34	0,57	0,82	1,53	2,44	3,61	6,94	11,80
20	19,6	0,42	0,69	1,00	1,84	2,94	4,31	8,21	13,80
25	24,6		0,84	1,22	2,22	3,55	5,19	9,79	16,10
30	29,6			1,44	2,61	4,16	6,08	11,70	16,80
35	34,5				2,99	4,76	6,96	13,00	21,10
40	39,5				3,36	5,39	7,84	14,60	23,60
45	44,5					6,02	8,73	16,20	26,70
50	49,5					6,65	9,61	17,90	28,80
55	54							19,40	31,10
60	59								33,20

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.