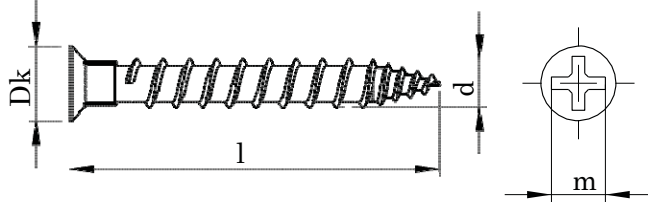


DIN 7505

SUNTA VİDASI
CHIPBOARD SCREW
SPANPLATTENSCHRAUBE

**Technical Informations / Teknik Bilgiler**

Thread size / Anma çapı (d)			3	3.5	4	4.5	5	6
Major Dia / Diş üstü çapı	d	min.	3,00	3,30	3,75	4,25	4,30	5,25
		max.	3,20	3,50	4,00	4,50	5,00	6,00
Head Dia / Kafa çapı	dk	min.	6,00	6,64	7,64	7,64	10,05	12,05
		max.	6,30	7,00	8,00	8,00	9,64	11,57
Pz (m)		min.	1,00	2,00	2,00	2,00	2,00	3,00
Material / Malzeme			C1018-C1022					
Drill range / Delme kapasitesi			0.05-0.18		0.10-0.23		0.10-0.28	
			mm.		mm.		mm.	

Thread size / Anma çapı (d)		3	3.5	4	4.5	5	6	
Length / Boy	min.	Weight / Ağırlık gr/p						
	max.							
13	12,10	13,90	0,39	0,64				
16	15,10	16,90	0,53	0,71	0,96			
18	17,10	18,90		0,77	1,18			
20	19,00	21,00	0,51	0,83	1,51			
25	24,00	26,00	0,59	1,04	1,62	1,88		
30	28,75	31,25	0,67	1,28	1,93	2,20	2,80	
40	38,75	41,25	0,93	1,42	2,20	2,80	3,45	
45	43,75	46,25		1,65	2,40	3,03	3,78	
50	48,50	51,50		1,88	2,72	3,15	4,11	6,44
60	58,50	61,50		2,00	3,24	3,27	4,78	7,47
70	68,00	72,00			3,75		5,47	8,73
80	78,00	82,00					6,16	10,40
90	88,00	92,00					6,85	11,45
100	98,00	102,00					7,54	12,50
120	117,50	122,50						14,64
150	147,50	152,50						18,92

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.