


DIN 7504 N

YILDIZ SİLİNDİR BAŞLI MATKAP UÇLU VİDA (YSB)
CROSS RECESSED PAN HEAD HEAD SELF DRILLING SCREW
SELBSTBOHRENDE SCHRAUBE MIT LINSENKOPF

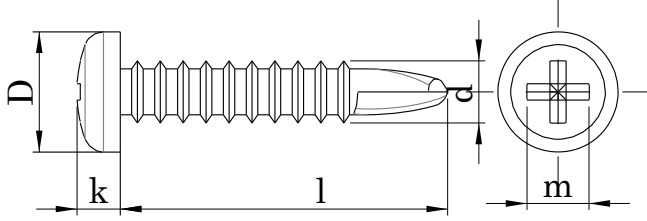

Technical Informations / Teknik Bilgiler

d	3,9	4,2	4,8
D	7,5	8,2	9,5
k	2,8	3,05	3,55
m	4,4	4,6	5
ph	2	2	2

Thread size / Anma çapı (d)		3,9	4,2	4,8
Drill range / Delme kapasitesi	min.	0,70	1,75	1,75
	max.	2,40	3,00	4,40

Thread size / Anma çapı (d)			3,9	4,2	4,8
Length / Boy (l)	min.	max.	Weight / Ağırlık gr/p		
13	12,10	13,90	5,80	4,30	3,70
16	15,10	16,90	8,80	7,30	5,80
19	18,00	20,00	11,70	10,30	8,70
22	21,00	23,00	14,70	13,30	11,70
25	24,00	26,00	17,70	16,30	14,70
32	30,75	33,25	24,50	23,00	21,50
38	36,75	39,25	30,50	29,00	27,50
45	43,75	46,25			34,50
50	48,75	51,25			39,50
60	58,80	61,20			6,21
70	68,80	71,20			7,06
80	78,80	81,20			7,85
90	88,80	91,20			8,80
100	98,80	101,20			9,62

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.